




Life Time No  
Maintenance



No attrition & High  
Temperature Resistant



Failure proof  
Electromagnetic  
Solenoid valves



Low Noise &  
High Intelligence



SS304



≤5 million times



## Turnstile Gate

### TWLD-TS2700


The Semi-Automatic Tripod Turnstile ensures smooth and easy passage with minimal passing resistance. It offers versatile working modes, including One way Traffic / Two Way Traffic operation, all configurable through buttons on the main control board.

In case of a power outage, the arms automatically drop for unimpeded access. Additionally, the turnstile features obstacle detection with automatic stopping for enhanced safety. It can also be seamlessly integrated with facial recognition, fingerprint, biometrics and other contactless systems for a no-touch user experience.

## Specification

|                        |                                                                                                                                                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension              | 510(L) x 310(W) x 1010(H)mm                                                                                                                                          |
| Material               | SS 304, acrylic                                                                                                                                                      |
| Channel Width          | 500mm                                                                                                                                                                |
| Traffic Direction      | One-way traffic/two-way traffic                                                                                                                                      |
| Traffic Speed          | 25~30 people/min in normally open mode and 15~20 people/min in normally closed mode The actual traffic speed is different from the traffic environment and personnel |
| Opening Mode           | Card swiping and Face, Fingerprint, biometric verification opening, button opening, etc.                                                                             |
| Opening Signal         | Dry contact signal                                                                                                                                                   |
| Life                   | ≤5 million times                                                                                                                                                     |
| Power                  | 30-60W                                                                                                                                                               |
| Applicable Temperature | -20~75°C (add thermostat below this temperature)                                                                                                                     |

## Dimension Drawing

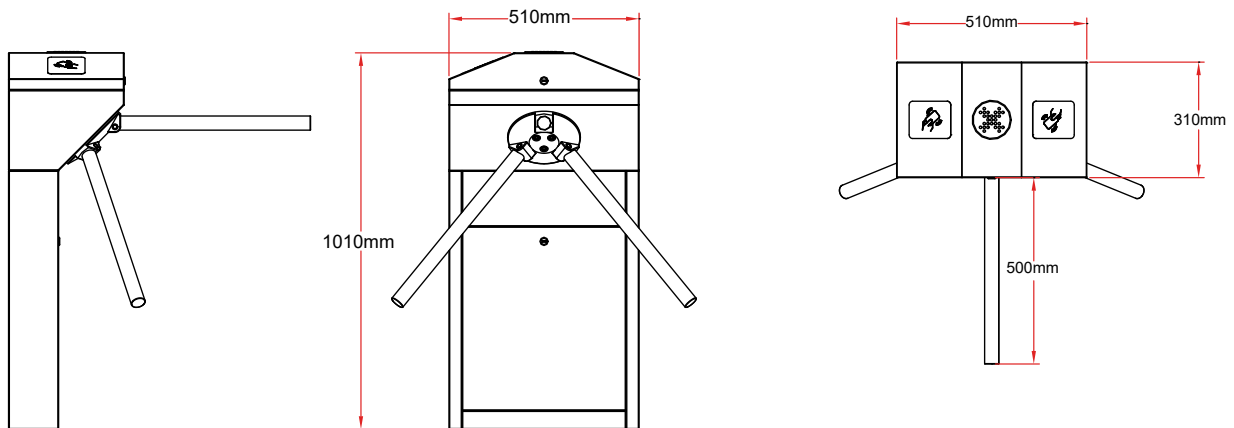

 **Address :** Dubai, UAE

 **Global Presence:** United Arab Emirates & Kingdom of Saudi Arabia (KSA)

 **Phone :** +971 54 777 0685

 **Sales :** sales@timewatchuae.com

**Disclaimer :** All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.